


Overview

The Yamaha MY4-DA is an optional digital-to-analog output card for compatible Yamaha digital mixing consoles and signal processors. It has four analog outputs via four balanced XLR3-32 type connectors.

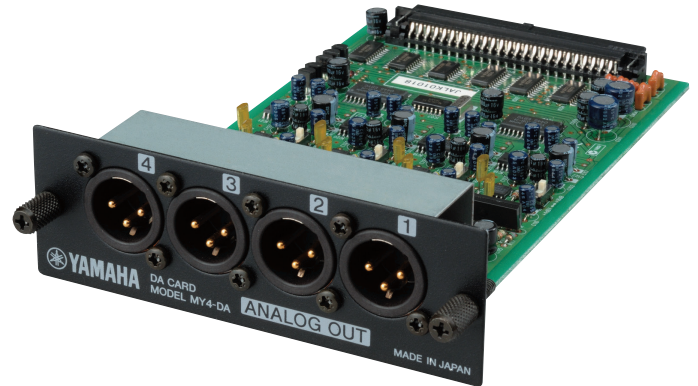

Features

- 20bit resolution, 4-out analog audio interface
- 4 x XLR3-32 connectors (balanced)
- Max output level before clip: +18dBu (default) / +4dBV
- Cannot be used at 96kHz
- Dimensions: 120mm x 40mm x 176mm (4.7" x 1.6" x 6.9")

Specifications

General Specifications

Channel Count	4OUT
Format	Analog
Sampling Frequency	44.1/48kHz
Resolution	20bit
Connector	4 x XLR-3-32 type connectors (balanced)

Analog Output Characteristics

Output Terminals	GAIN Switch	Actual Source Impedance	For Use with Nominal	Output Level		Connector
				Nominal	Max. before Clip	
ANALOG OUTPUT 1-4	+18dB	10k Ω	600 Ω Lines	+4dB (1.23V)*	+18dB (6.16V)*	XLR3-32 type Balanced***
	+4dB			-10dBV (316mV)**	+4dBV (1.58V)**	

* 0 dB is referenced to 0.775 Vrms.


** 0 dBV is referenced to 1.00 Vrms.

*** 1=GND, 2=HOT, 3=COLD

Sampling rate: 30.08kHz - 50.88kHz

Dimensions

Unit: mm (inch)

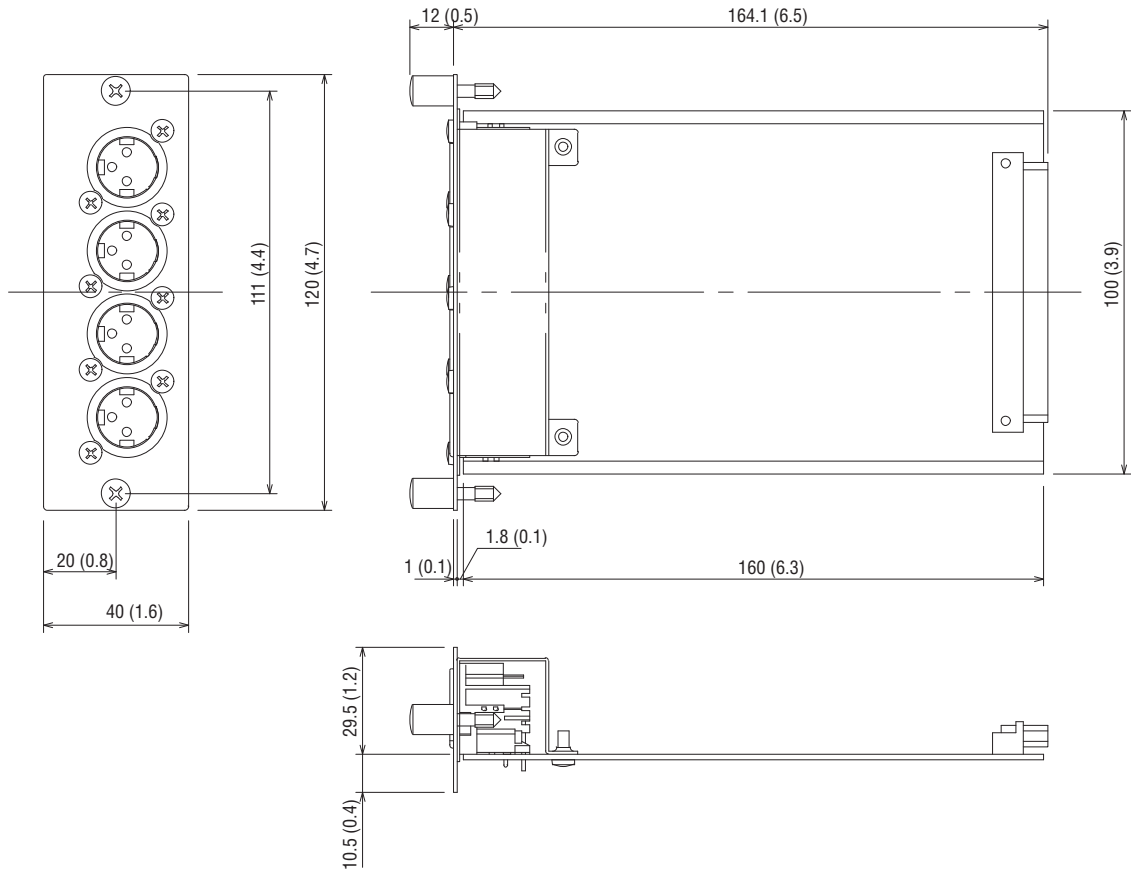

Architectural and Engineering Specifications

The Yamaha MY4-DA shall be an optional digital-to-analog output card for compatible Yamaha digital mixing consoles and signal processors. It shall have four analog outputs via four balanced XLR3-32 type connectors. Dimensions shall be 120 (W) x 40 (H) x 176 (D) mm.

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in March, 2017

YAMAHA CORPORATION
P.O.BOX 1, Hamamatsu Japan
www.yamahaproaudio.com