


■ A way of confirming Media Receivers list in TwonkyMedia server.

Notes: – This way is only for part of BUFFALO NAS, LS-CHL series, LS-SL series .
There are some NAS like LS-WSXL series which not able to confirm by this way.


1.Check IP address of NAS by using NAS Navigator2

You can see IP address in the display in NAS Navigator2

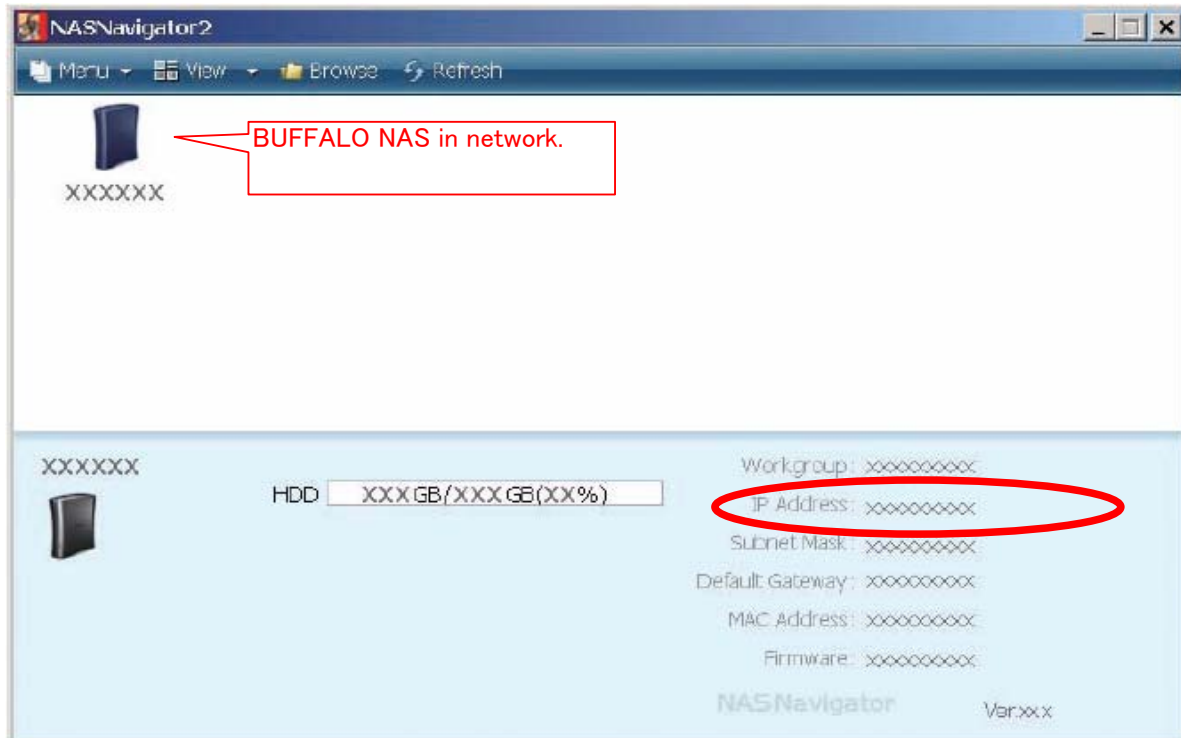


2.After launch the browser, enter IP address of NAS, and “:(colon)9050” the end of this address additinally.

例)「XXX.XXX.XXX.XXX:9050」
X is number.

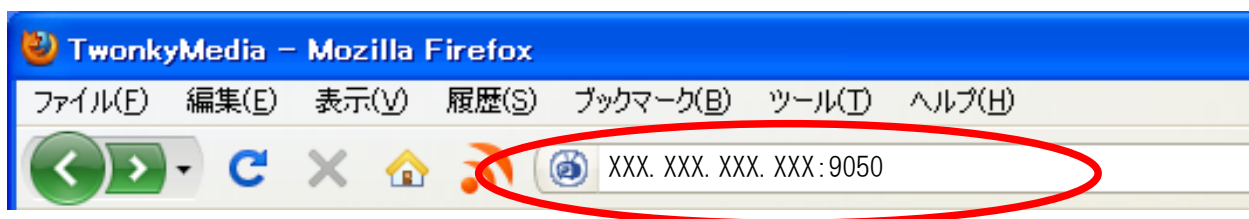

3.Click [TwonkyMedia Settings]

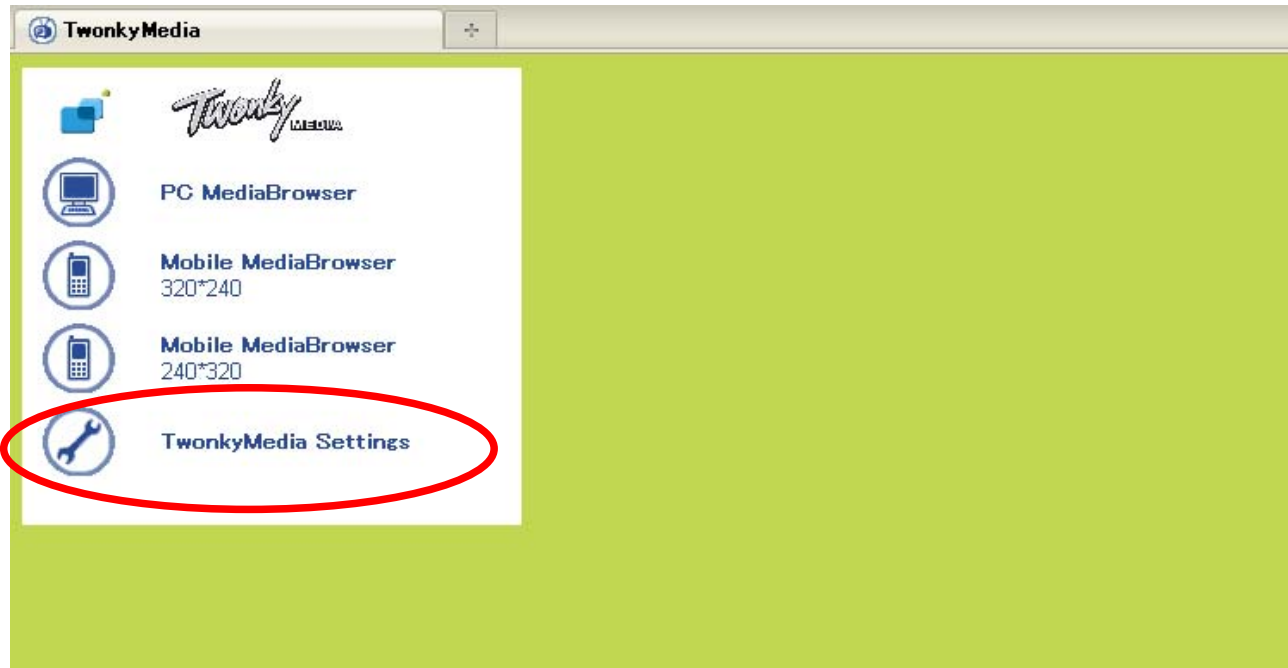

4.Click [Clients/Security] in TwonkyMedia configuration display.



6. Media Receiver name of NP-S2000 before v1.07

You can see Media Receivers list in [Clients/Security] display.

If it connected NP-S2000 which version is before ver1.07 with this NAS at once, the Media Receiver name of NP-S2000 is "YAMAHA Network receiver".

It should change to "Generic Media Receiver" or "Generic DLNA1.5" as update NP-S2000 to after v1.08 and reset Media of TwonkyMedia server in NAS.

You can reset Media Receivers list if you click [Reset List].

Twonky MEDIA TwonkyMedia Configuration: Clients/Security
Version 4.4.19_e2

Save Changes Cancel

User name:
Password:
Set a user name and a password to restrict access to these configuration pages. Leave both blank to disable access restriction.

Media Receivers:
Enable sharing for new media receivers automatically: ☒ [Reset list](#)

☒	XX:XX:XX:XX:XX:XX	YAMAHA Network Receiver	XXX.XXX.XXX.XXX	NP-S2000
☒	XX:XX:XX:XX:XX:XX	Windows Media Player	XXX.XXX.XXX.XXX	
☐		-/-		

Lists of media receivers that have contacted the server. For each media receiver, the access to the server can be restricted. Automatic receiver detection does not always work. In this case the server simply assigns "Generic DLNA client" and no client adaptation will take place. Media receivers that are not identified correctly can however be adapted manually by means of the drop down menu above. To delete an entry, please set it to -/-.

6. Media Receiver name of NP-S2000 after v1.08.

After reset Media Receivers list, If NP-S2000 is connected with NAS via network again, the Media Receiver name is changed.

In the case of TwonkyMedia server, it's "Generic Media Receiver" or "Generic DLNA1.5".

Twonky MEDIA TwonkyMedia Configuration: Clients/Security
Version 4.4.19_e2

Save Changes Cancel

User name:
Password:
Set a user name and a password to restrict access to these configuration pages. Leave both blank to disable access restriction.

Media Receivers:
Enable sharing for new media receivers automatically: ☒ [Reset list](#)

☒	XX:XX:XX:XX:XX:XX	Generic Media Receiver	XXX.XXX.XXX.XXX	NP-S2000
☒	XX:XX:XX:XX:XX:XX	Windows Media Player	XXX.XXX.XXX.XXX	
☐		-/-		

Lists of media receivers that have contacted the server. For each media receiver, the access to the server can be restricted. Automatic receiver detection does not always work. In this case the server simply assigns "Generic DLNA client" and no client adaptation will take place. Media receivers that are not identified correctly can however be adapted manually by means of the drop down menu above. To delete an entry, please set it to -/-.